

Showroom: - (Except Headquarter Office) Mon-Sat : 9:30am -7:00pm

Sunday : 10:30am -5:00pm

HEAD QUARTER

No: 3, Jalan Taming 2A
No: 3, Jalan Taming 2A
KWS Perindustrian Taming Jaya
43300 Balakong
Selangor D. E., Malaysia
Tel: +603 8962 3288 (13 Lines)
Fax: +603 8962 3688 sales@reliancehome.com

PUCHONG No: 9, Jalan Puteri 2/1 Bandar Puteri Puchong 47000 Puchong Selangor D. E., Malaysia Tel: +603 8060 3885 Fax: +603 8061 2588 puchong@reliancehome.com

















DAMANSARA

No: 98G, Jalan SS21/39 Damansara Utama 47400 Petaling Jaya Selangor D. E., Malaysia Tel: +603 7729 3888 Fax:+603 7729 7988

CHERAS

damansara@reliancehome.com cheras@reliancehome.com

No: 62 Ground Floor Jalan Cerdas, Taman Connaught, Cheras 56000 Kuala Lumpur, Malaysia Tel: +603 9100 5094 Fax: +603 9100 5096

SHAH ALAM

No: 5-1-2, Jln Setia Prima (A) U13/A, Setia Alam Seksyen U13, 40170 Shah Alam, Selangor D. E., Mal Tel: +603 3341 6672 Fax: +603 3341 9672 setiaalam@reliancehome.com



Fully Custom Made . Variety choice of Frame & Glass Colors . 2 Years Warranty.



Surface Finishes : Glossy Polish/Matt
Material : SUS304 Stainless Steel

Function : Pivot Door (outward)



| Bar Hinge System |



Surface Finishes : Glossy Polish/Matt Material : SUS304 Stainless Steel

Function : Pivot Door (outward)























MultiPoint Lock

(SUS304

Stainless

For better

security


against

adverse

force

Steel)





(Barless)



Pull Down Handle To Lock & Open

Pull Up Handle To Unlock & Open

| Material Specification | | FRAME |

Frame Material : Aluminum Aluminium Thickness: 1.8 - 2.2mm : 6063-T5 Aluminium Grade

Infill Panel : 6.38mm - 8.38mm

Double Layer Laminated Glass

Locking System : Multipoint Locking Handle : Zinc Die Cast

| DOUBLE LAYER LAMINATED GLASS |

Safety & Standards

RELIANCE HOME Glass is safety glazing material, conforming to the requirements of

- CPSC 16FR 1201 Category I PerformanceCPSC 16FR 1201 Category II Performance criteria
- Underwriters Laboratories' UL972 Standard for
- Security Glazing Class 1 of the ASTM International's F1233 Security Glazing Test Standard.

























LOCKING & BAR HINGE SYSTEM

Surface Finishes

: Glossy Polish / Matt : SUS304 Stainless Steel

Material **Function**

: Pivot Door

Glass

: 6.38mm - 8.38mm

Double Layer


Laminated Glass

PRODUCT FEATURE:-

- ✓ Stronger Aluminum Frame Profile
- ✓ Safety Multipoint Lock
- ✓ Non-Shattered Laminated Glass
- ✓ Better Security
- ✓ Better weather sealing performance
- √ Help reduce door warpage

TOP HUNG WINDOW

✓ Stronger Aluminum Frame Profile √Full S/Steel Accessories √Multipoint Lock System Non-Shattered Laminated Glass Saflex Saflex



PRODUCT FEATURE:-

- ✓ Aluminum Frame c/w
- √Water/Rust Proof with Center Bar
- ✓ Multipoint Lock System
- ✓ Non-Shattered Laminated Glass

THE SLIDING WINDOW





PRODUCT FEATURE:-

- ✓ Smooth Gliding System
- ✓ Seemless Embedded Handle
- ✓ Single Point Lock System
- √Non-Shattered Laminated Glass

THE PRESTIGE SERIES (F03)



Heavy Duty Roller System

- 1. In the bottom part of the door, a carriage mounted on needle bearings slides in the threshold section.
- 2. The guiding threshold section is designed for dis-mantling-free cleaning and maintenance.
- 3. In the top part of the door, a hinge fitted with guiding rollers slides in the rail section.

DOUBLE LAYER LAMINATED GLASS FACTS

Safety & Standards

RELIANCE HOME Glass is safety glazing material, conforming to the requirements of

- CPSC 16FR 1201 Category I Performance
- ➤ CPSC 16FR 1201 Category II Performance criteria
- Underwriters Laboratories' UL972 Standard for Security Glazing
- ➤ Class 1 of the ASTM International's F1233 Security Glazing Test Standard.

Impact Performance

RELIANCE HOME laminated safety glass will resist penetration and will absorb the energy of the impact. The glass will remain intact when broken, with the glass fragments remaining firmly bonded to the interlayer, thus minimising the risk of injuries from sharp edges and falling alass.

Sound Reduction

The viscoelastic properties of the SAFLEX PVB Interlayer RELIANCE HOME used provide a dampening effect on the transmission of sound, thus reducing unwanted noise.

Security

If broken, laminated safety glass will remain intact in its frame and will continue to safeguard the building until the glass is replaced. Due to the tough PVB interlayer used, it will continue to provide protection and resistance to entry after the glazing is broken.

UV Control

The UV absorbing additive in the Saflex PVB interlayer used by RELIANCE HOME can screen out almost all of the sun's damaging UV thus providing protection against discolouration and damage to fabrics, furniture, wall coverings, furnishings, artworks, etc.





















Heavy Duty Roller System

- 1. In the bottom part of the door, a carriage mounted on needle bearings slides in the threshold section.
- 2. The guiding threshold section is designed for dis-mantling-free cleaning and maintenance.
- 3. In the top part of the door, a hinge fitted with guiding rollers slides in the rail section.

















THE PRESTIGE MULTIFOLDING DOOR

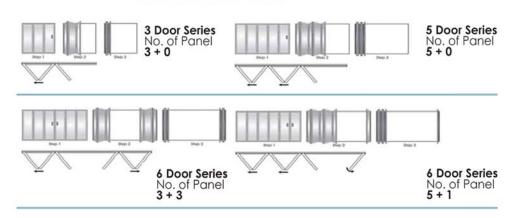

THE LUXE MULTIFOLDING DOOR

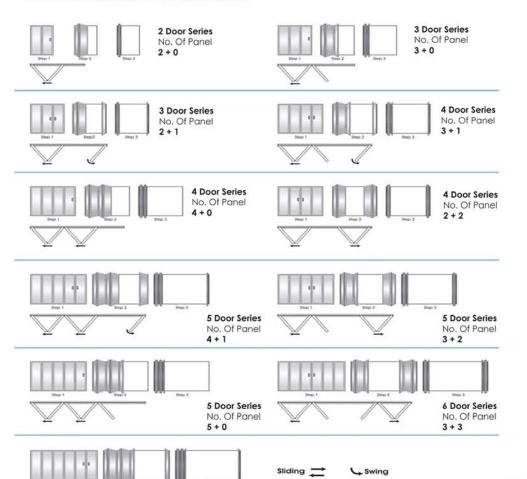

6 Door Series No. Of Panel 5 + 1







more here!





Handle Option2: Conventional Lock



Product Specification

Frame Material : Powder Coated Aluminum

: 6.38mm - 8.38mm Glass

Double Layer Laminated Glass

Function : Sliding Type Page 10

Applications

2 tracks

2-leaf - 2 tracks




4-leaf 2 tracks



Integrated composite 2-leaf




3-leaf




3-leaf joined 2 tracks







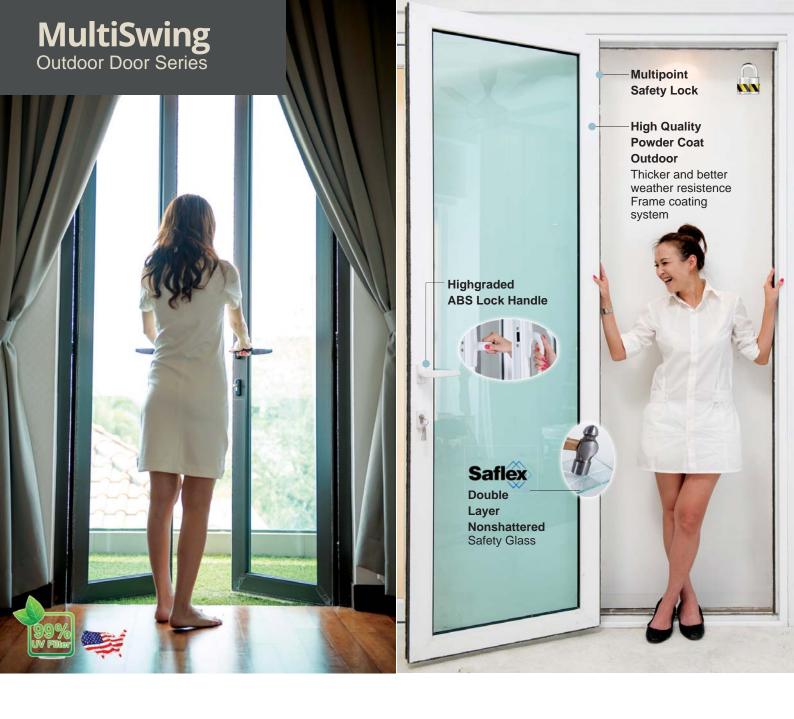

Security



MULTIPOINT LOCKING SYSTEM

For better security against adverse force (SUS304 Stainless Steel)



Saflex



DOUBLE LAYER NONSHATTERED Safety Glass (PVB: USA) ANSI Z97.1 CPSC 16 CFR 1201

- Cat 1

Applications

1 or 2-leaf open-cut or open-in door





Wide choice of Frame Colours and Glass Colours













Staircase Model



































- Meets all the national safety glazing standards (ANSI Z97.1CPSC 16 CFR 1201 - Cat II)
- Resist penetration, won't shatter into dangerous fragment

- Typical STC (Sound Transmission Class) ratings between 34 to 40* Can reduce perceived noise by up to 50% Typical STC (Sound TransmissionClass)

Security

Standard LAG (1/4" with 0.060" thickness) provides a significant improvement in resistance to attack from a variety of hand held weapons in: Rock, Hammer, Pry bar, Brick, Chisel, Axe, etc.

Screens out 99% of harmful & damaging UV rays up to 380 nm (= SPF 50+) Protects delicate plants, fabrics, carpets, and furniture from fading

Solar Data	Test method	Clear Glass	Visible Light (D65)	Solar
Transmission	ISO 9050/EN410/ NFRC 300	2 x 3.0 mm	88%	71%
Reflection	ISO 9050/EN410/NFRC 300	2 x 3.0 mm	8%	7%
Absorption	ISO 9050/EN410	2 x 3.0 mm	4%	22%
Solar Heat Gain Coefficient (SHGC)	NFRC 300	2 x 3.0 mm	0.80	
Light to Solar Gain (LSG)		2 x 3.0 mm	1.10	
UV Blocking	Wavelength Damage Weighted	2 x 3.0 mm	300 - 380 300 - 400	> 99% > 96%

Our laminated glass has quality tested by the following certification bodies:-

















Skylight Metal Structure Choice







Hollow T-Bar



Wave T-Bar



Pigeon T-Bar



OriginT-Bar

















Glass House

VVPGlass Door/ Window

VVPOffice Glass Partition

TG800Glass Sliding Door











Alum. Glass Partition

Tempered Glass Room

TG800 Glass Door

Glass Dining Divider

Alum.Glass Divider

ALL TYPES OF GLASS WORKS. GLASS PARITIONS, ANY TYPE OF GLASS DOOR. YOU NAME IT, WE MAKE IT FOR YOU.











Aluminum Glass Partition

Study Glass Room

Closet Glass Door

Living Hall Glass Wall



Roof Entertainment room

Waiting Glass Lounge



Interior Glass Wall



Kitchen Glass Door







Glass Leisureroom



Aluminum Louvres Fence



Glass Partition

Office Glass Door Page 14







Thicker and better weather resistence Frame coating system











SL4055 Kitchen Door



SL801 Walk in Wardrobe



SL801 Shoe Room Door



SL1000 Bathroom Door



SL801 Closet Door



SL804 Kitchen Door



SL804 Yard Door

- No Bottom Track
- Water-proofing
- Rust-proof
- Heavy Duty Roller
- Custom Made
- **2 Years Warranty**



SL822 Wet/Dry Kitchen

SLIDING DOOR

Lockset Choice



ZL-102 YM-6 A5/A6



MultiSliding Lockset (Black/White)

R8 Lock

C Handle L-106 (25mm)

SWING DOOR

Lockset Choice



Safety Lock (Silver)



Round Lock (Silver/Bronze)



Lever Lock (Square Lock)



SLA8504 (Square Lock)



SW811 Kitchen Door



SW804 Wardrobe Door



SFN11819 Study Room Door



SL822 Kitchen Door



SL813 Bathroom Door



Office Meeting Room



SFN10219 **Entertainment Room**



SL804 Study Room Door



SW801 Living Hall to Garden



SW801 (SFN11300) Room Door

Aluminum Swing & Sliding Door Model Selection





Quick Facts



Material Section

Frame Color

Acrylic

Color Selection







SP84 Light Belge

DD##" Trasclucent Effect / __





Laminated Non-Shattered Glass



Model: REH100 SSL / SUS304 Stainless Steel Header & Handle G.Thickness: 10mm Clear Tempered

Model: REH100 Single Glass Door G.Thickness: 10mm Ceramic White Tempered Glass

REH Shower Series















RDL-A18P

SF04S


RDL-A13

RLA-T109

RLA-T110

ET-90-6







Model: REH100 AL / Finish: Aluminium Chromed Flnish G.Thickness: 10mm Clear Tempered / Header: Aluminum



Model: REH100 SQ / Finish: Stainless Steel Glossy Polish G.Thickness: 10mm Clear Tempered / Header: S.Steel 304



Model: REH100 SQALU: Aluminium Chromed Finish G.Thickness: 10mm Clear Tempered S.Steel 304

Swing Shower Series



Model: REH300 - 180° Hinge G.Thickness: 10mm Clear Tempered Track: Aluminium Chromed Finish Handle: SUS304 Stainless Steel



Model: REH200 - 135° Hinge G.Thickness: 10mm Clear Tempered Track & Handle: SUS304 Stainless Steel



Model: REH 400 - 90° Hinge G.Thickness: 10mm Clear Tempered Header & Handle: SUS304 Stainless Steel

Sliding Shower Series



Model: RS-5038P- 2 Slide + 1 Fix G.Thickness: 6mm Clear Tempered Track: Aluminium Chromed Finish Handle: SUS304 Stainless Steel



Model: RS-5028P- Both Way Sliding G.Thickness: 8mm Clear Tempered Track: Aluminium Chromed Finish Handle: SUS304 Stainless Steel



Model: RS-5018P-1 Fix + 1 Slide G.Thickness: 8mm Clear Tempered Header: Aluminium Chromed Finish Handle: SUS304 Stainless Steel



Model: RS-5068P-1 Fix + 1 Slide G.Thickness: 8mm Clear Tempered Header: Aluminium Chromed Finish Handle: SUS304 Stainless Steel



Model: RS-5068PL- 2 Slide + 2 Fix G.Thickness: 8mm Clear Tempered Header: Aluminium Chromed Finish Handle: SUS304 Stainless Steel



Model: RS-5018PL - 2 Slide + 2 Fix G.Thickness: 8mm Clear Tempered Track: Aluminium Chromed Finish Handle: SUS304 Stainless Steel

Page 19



Model: KK-T72 - 1 Sliding Door+ 1 Fix Material: Full SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: Custom Made



Model: KW-P51 Swing Door Material: Full SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: 1200mm x 2000mm H 1400mm x 2000mm H



Model: KK-T41 - 2 Sliding Door + 2 Fix Material: Full SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: 985 x 985 x 2000mm H



Model: KK-T111- 2 Panel Sliding Door Material: Full SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: Custom Made



Model: RB180Z- Folding Door Handle & Header: SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: Custom Made



Model: RB090R - 2 Panel Swing Door Handle & Header: SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: Custom Made



Model: RB180 Swing Door Material: Full SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: Custom Made



Model: RB090- 2 Panel Swing Door Material: Full SUS304 Stainless Steel G.Thickness: 8mm Clear Tempered Size: Custom Made



Model: RS120- 2 Panel Sliding Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made



Model: RS130- 2 Panel Sliding + 1 Fix Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made



Model: RS130- 2 Panel Sliding + 1 Fix Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made



Model: RS140- 2 Panel Sliding + 2 Fix Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made



Model: RS-431 / 3 Panel Sliding + 1 Fix Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made



Model: RS-220 / 2 Panel Sliding + 2 Fix Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made



Model: RS-109 / 2 Panel Folding + 1 Fix Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made



Model: RS-111 / 2 Panel Folding + 2 Fix Frame: Powder Coated (12 color choices) Infill Panel: Polystrene/ Eco Panel/T.Glass Size: Custom Made