

ALUM  
**+ MULTISLIDING**  
DOOR



# PARTS/ ACCESSORIES

Our commitment to better designs



**MULTISLIDING** Frame Profile



## SAFETY FEATURES



**ANTI EXPLOSION** GLASS  
(Double Layer Laminated Glass)

## FEATURES & BENEFITS

- High performance **ANTI-LIFT** Sliding Track against burglary break in.
- Double Layer Laminated glass provides durability and better sound control.
- Integral Pull Rail provides smooth , easy open and close sliding operation.
- MultiPoint Lock to reinforce the tightness of the door to the frame and provide better security.
- Sleek and Modern frame design provide you better vision and appearance to your home.

## CONFIGURATION



Integral Lock



Anti-Lift Sliding Track



Door Stopper



Premium Handle


# MULTISLIDING DOOR

Heavy Duty Sliding Roller




## CONFIGURATION


2-leaf - 2 tracks

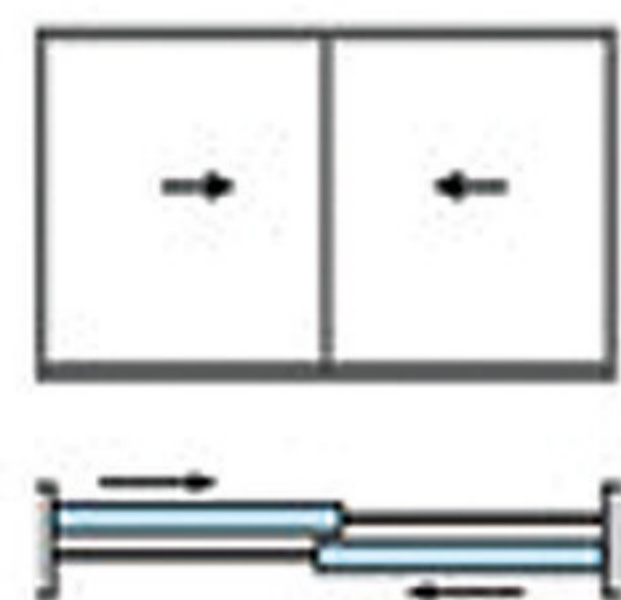

4-leaf  
2 tracks

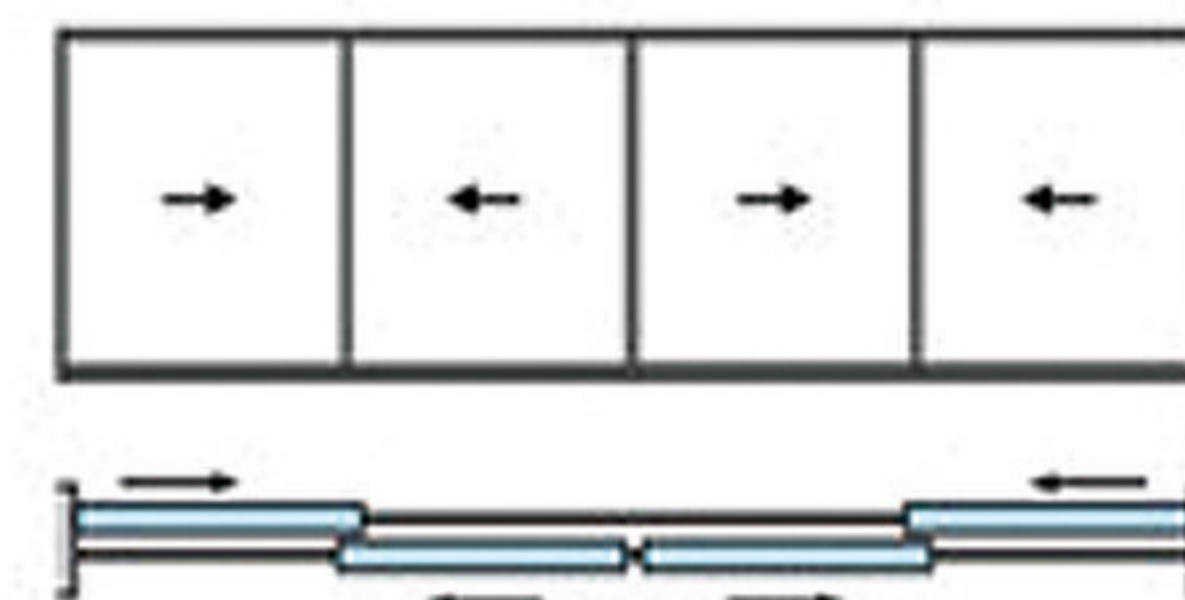


Integrated composite  
2-leaf

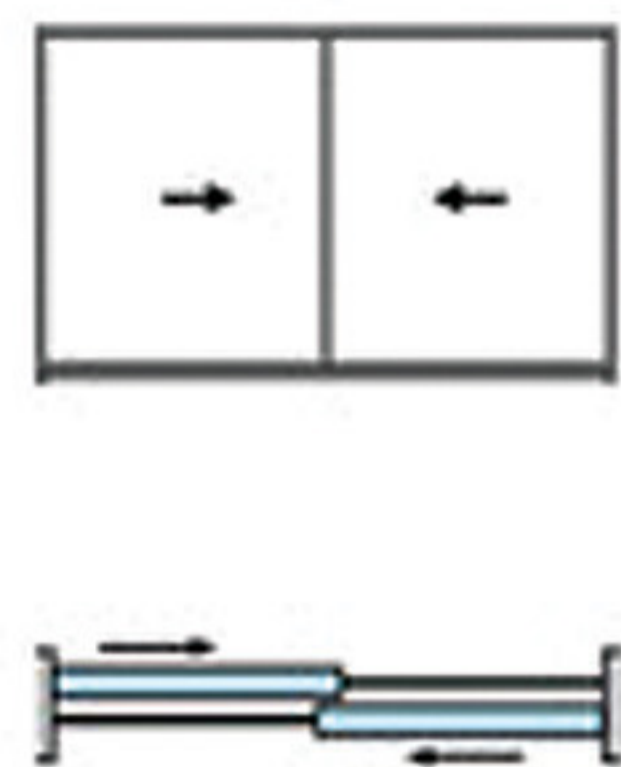


3 tracks


3-leaf  
3 tracks

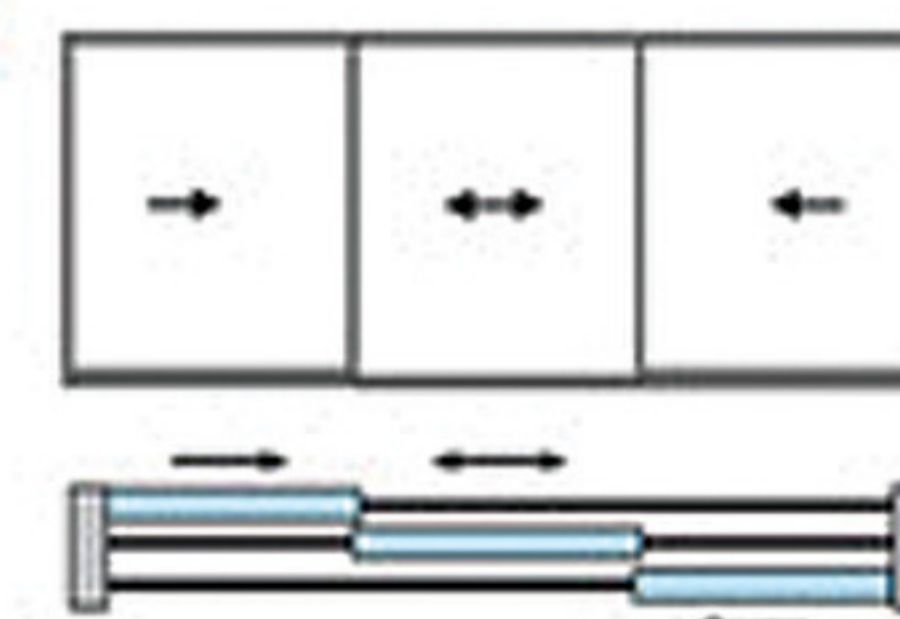


3-leaf joined  
2 tracks

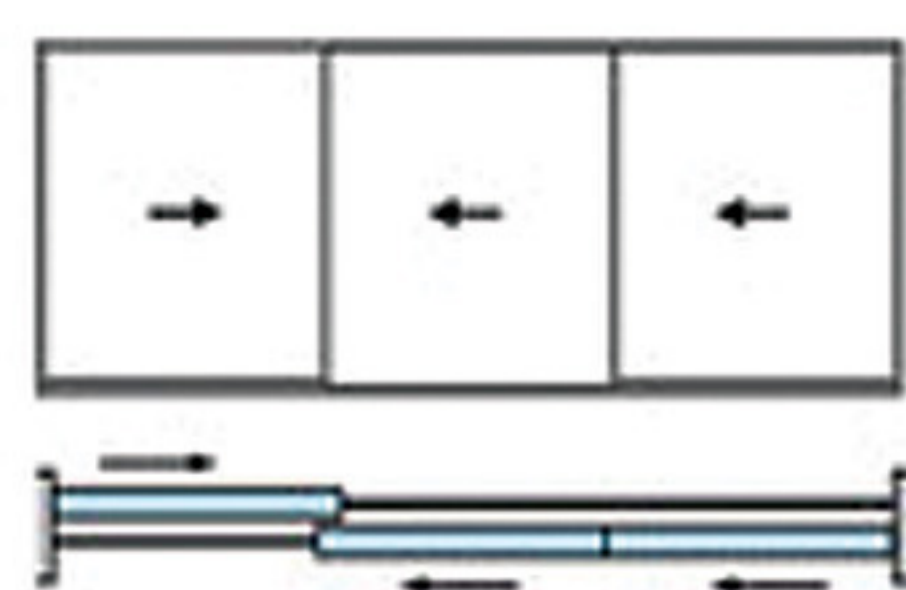

6-leaf  
3 tracks

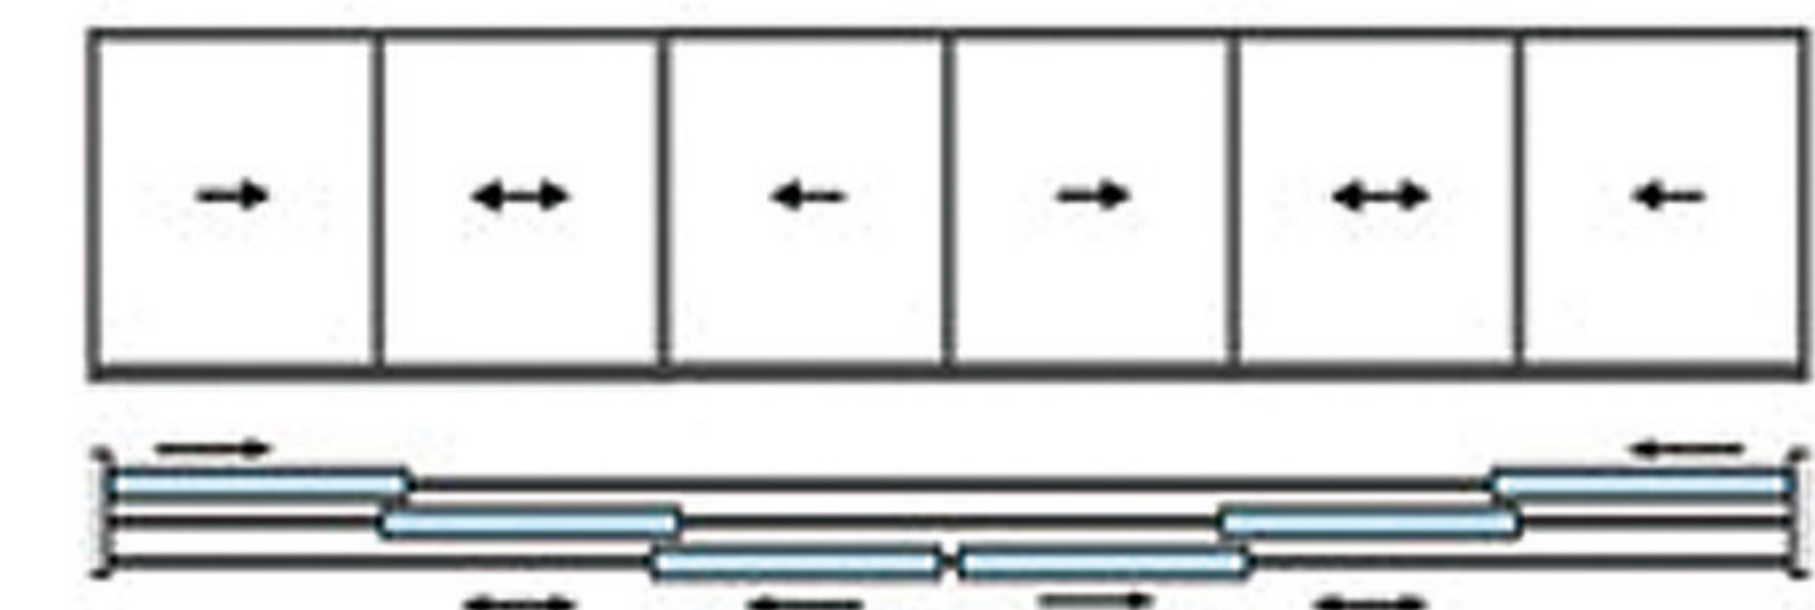


3-leaf independent  
2 tracks

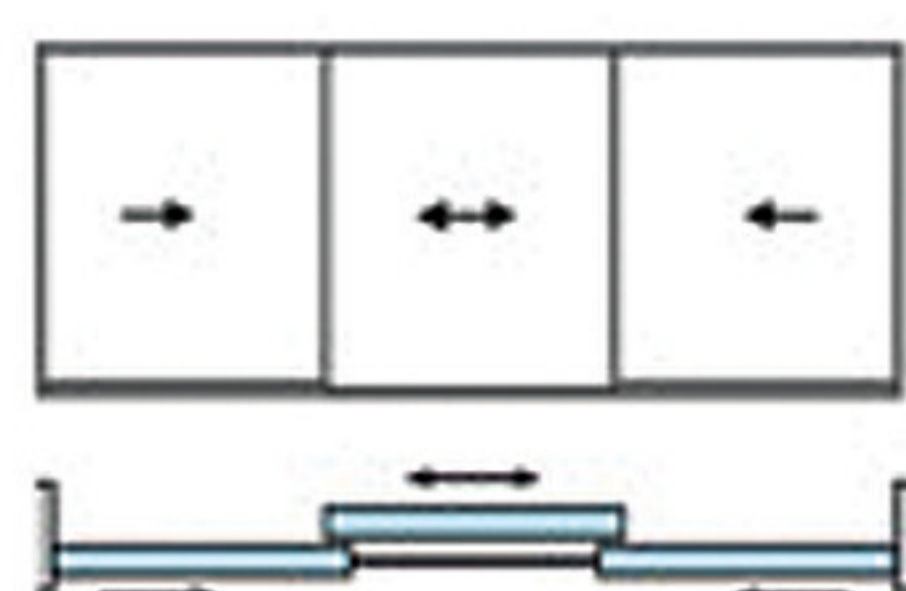

4 tracks

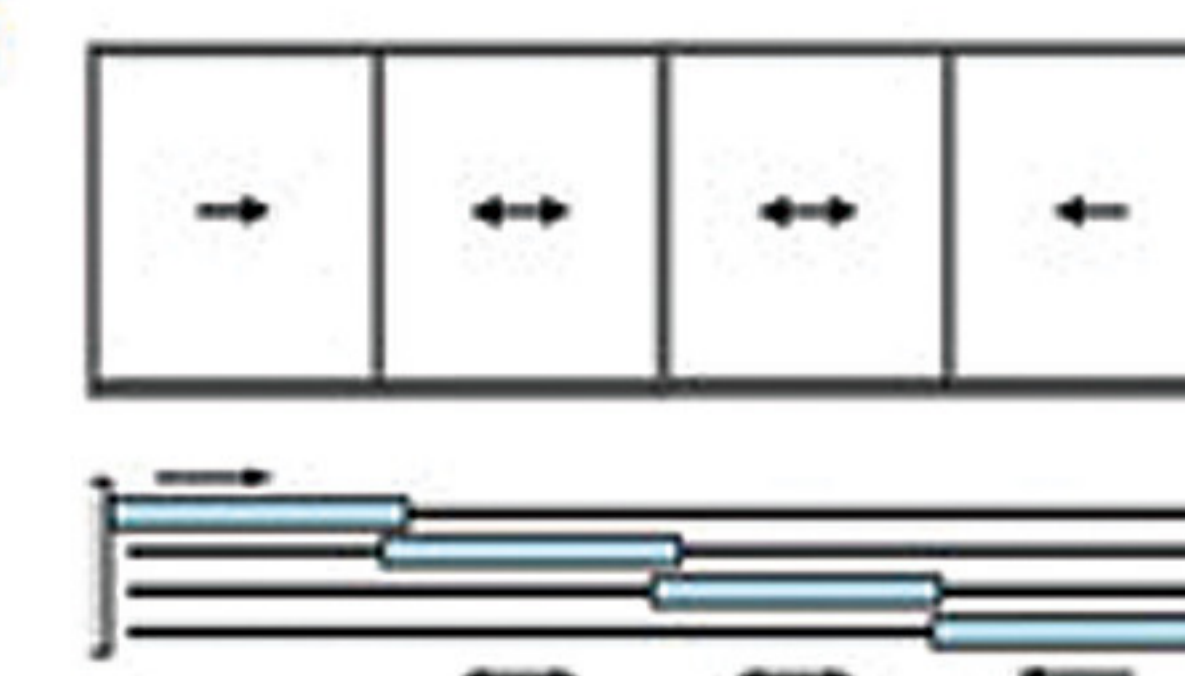

4-leaf  
4 tracks



### Model: Multisliding Door

Custom Made just for you

ITEM	PRICE CALCULATION	REMARK
SIZE	Minimum sqft: 42sqft	Custom Made size
USE	Outdoor Area: Side Entrance, Yard, Balcony Door	

Frame Finish	Powder Coated (Fluorocarbon Chemistry Technology)
Glass Type	Double Layer Laminated Safety Glass
Accessories	Die Cast Zinc Lock
Product Name	MultiSliding Door
Frame Color	 (Exterior Usage, VOC Free)
Glass Color	
Glass Thickness	3mm+0.38+3mm (Upgrade Option : 8.38mm or 10.38mm)
Product Origin	Malaysia (Selangor )
Warranty	2 Years





# HEAVY DUTY ROLLER SYSTEM




ROLLER TEST PERFORMED  
EN13126-15:2008

HOCKEY two-wheel Delrin adjustable roller with roll bearings


Body and adjusting slide are made of nylon charged with fibre glass. The adjusting screw and the fastening screw are made of stainless steel. Wheels are made of Delrin on roll bearings. The rotating pin is made of hardened steel.

Providing a smooth and quite gliding experience.

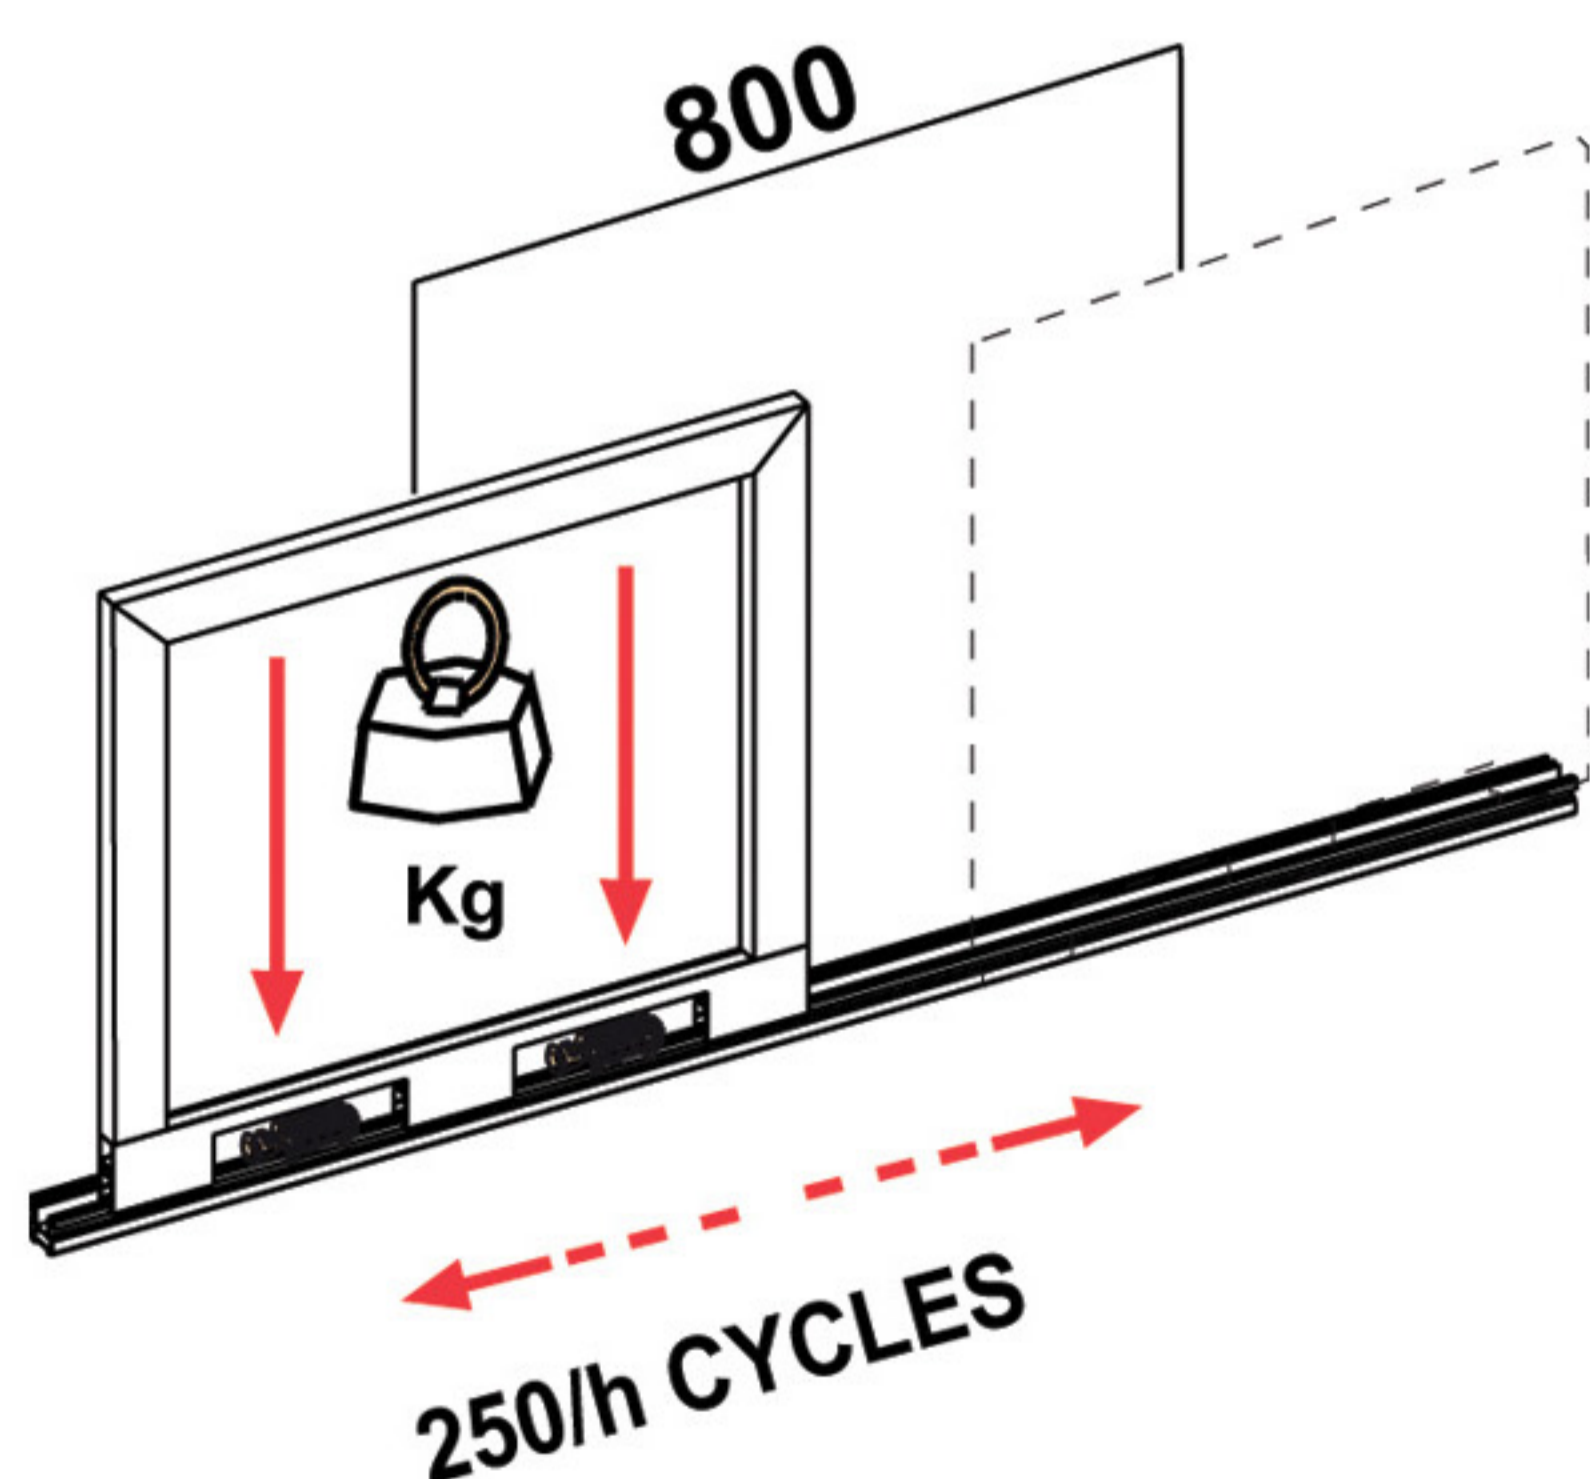


## Durability Test

25,000 Cycle Tested  
**130KG**

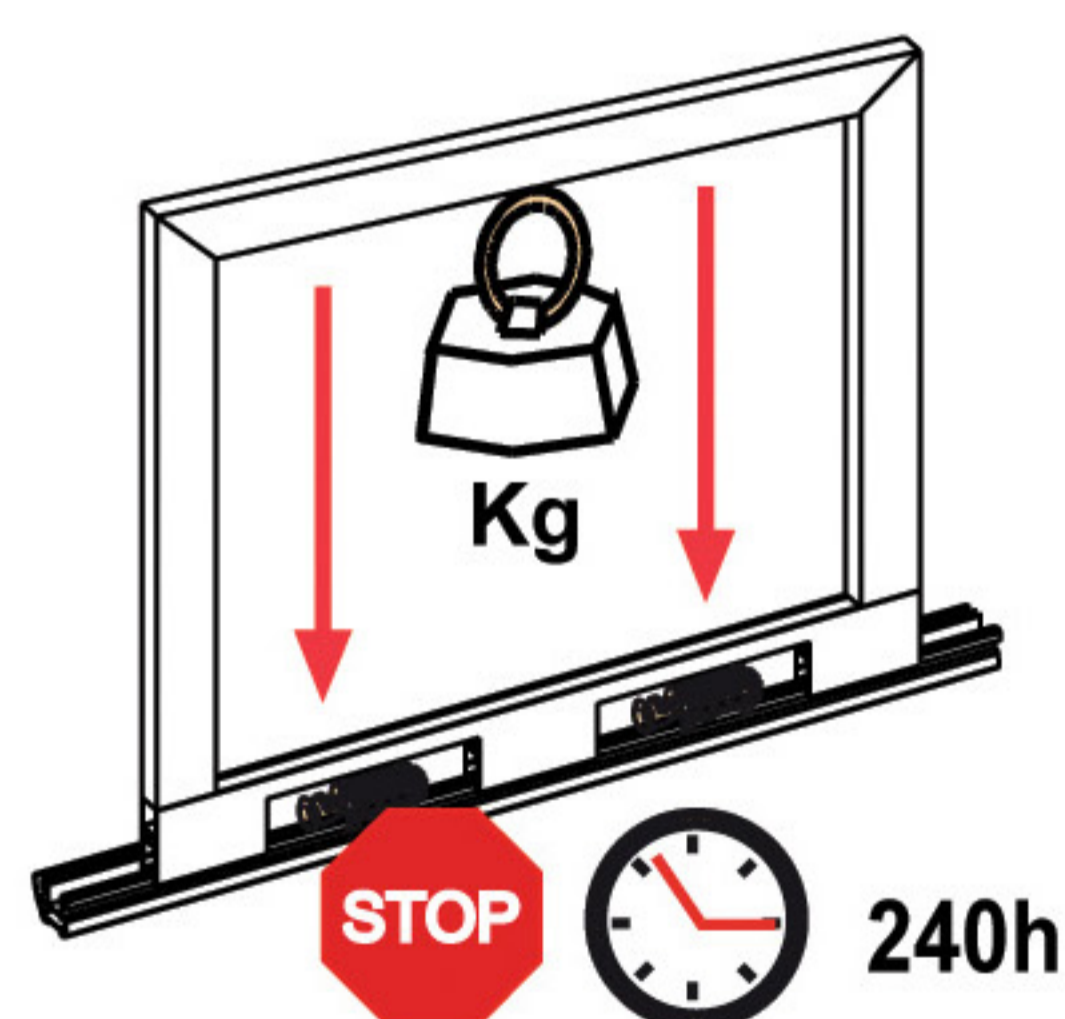

## Static Test

240 Hours Tested  
**130KG**  
UNI EN 1670:2007

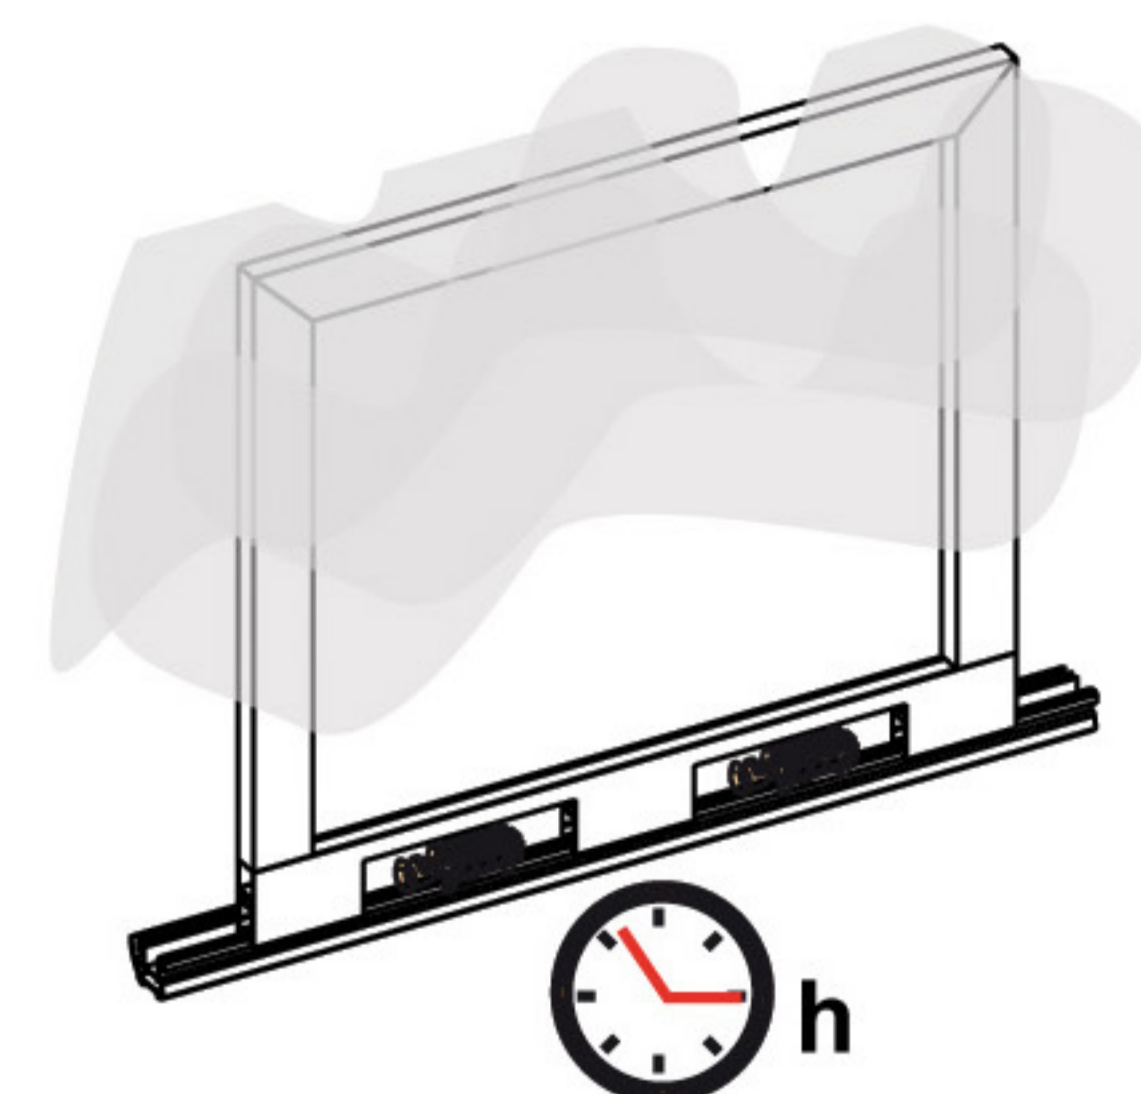

## Salt Spray & Corrosion Test

480 Hours Tested  
**130KG**  
UNI EN 1670:2007

pH 7.0:7.2  
Temperature 35°C  
Sodium Chloride: 50/gr.liter

CUSTOMER  
PHOTOS

MULTISLIDING  
DOOR



CUSTOMER  
PHOTOS

MULTISLIDING  
DOOR





CUSTOMER  
PHOTOS

MULTISLIDING  
DOOR

